

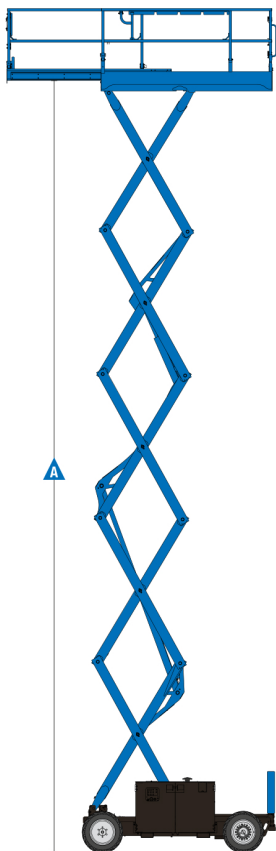




# Self-Propelled Scissor Lifts

## GS-4069 DC

### Specifications

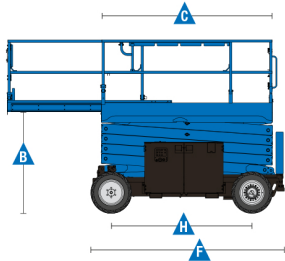

Models	GS-4069 DC
Measurements	Metric
Working height maximum*	14.02 m
<b>A</b> Platform height maximum	12.2 m
Drive height	12.2 m
<b>B</b> Platform height - stowed	1.65 m
<b>C</b> Platform length - outside	2.79 m
extended	4.32 m
Slide-out platform extension deck	1.52 m
<b>D</b> Platform width - outside	1.6 m
Toeboard height	0.15 m
<b>E</b> Height - stowed	2.74 m
rails lowered	2.08 m
<b>F</b> Length - stowed	3.12 m
platform extended	4.5 m
with outriggers	3.76 m
<b>G</b> Width	1.75 m
<b>H</b> Wheelbase	2.29 m
<b>A</b> Ground clearance - center	0.24 m

### Productivity

Maximum platform occupancy**	3
Lift capacity	363 kg
Extension deck capacity	136 kg
Drive height	
Drive speed - stowed	7.2 km/h
Drive speed - raised	0.5 km/h
Gradeability - uphill stowed***	35%
- downhill stowed***	15%
Maximum outrigger leveling:	
front/back uphill	
side to side	
Turning radius - inside	2.11 m
Turning radius - outside	4.6 m
Raise/lower speed	61 / 28 sec
Non-marking tires - rough terrain	30 x 66 cm

### Power

Power source	48V DC (eight 6V batteries, 315 Ah capacity)
Hydraulic system capacity	68.1 L

### Weight\*\*\*\*

	4,924 kg
--	----------

### Standards Compliance

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* CE/AUS markets: GS™-3369 and GS™-4069 are limited to 2 person platform occupancy when used outdoors.

\*\*\* Gradeability applies to driving on slopes. Gradeability may vary depending on the weight of options installed on machine. See operator's manual for details regarding slope ratings.

\*\*\*\* Weight varies depending on options and country standards.